


BAIHUA-YangDong BAIHUA-EPA Authentication SERIES DIESEL GENERATOR SETS

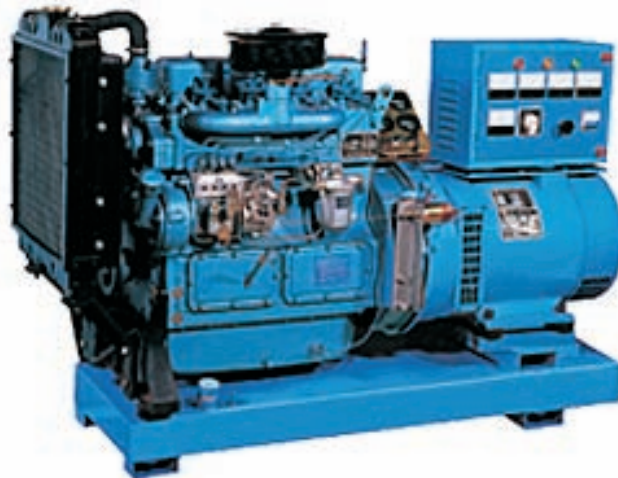

BAIHUA-YangDong SERIES DIESEL GENERATOR SETS

Model		KBY-8	KBY-10	KBY-12	KBY-16	KBY-20
Rated Power(KW)		8	10	12	16	20
ENGINE	Model	YSAD380D	YD480G	Y485G	YSD490D	Y4100G
	Rated output (kw)	10	13.5	16	21	25
	Governing method	Mechanical				
	Intaking method	Natural aspirated				
	Fuel Consumption(g/kw.h)	247		248	247	
	Cooling Starting Method	Closed water cooled/electric starting				
GENERATOR	Model	KB-8	KB-10	KB-12	KB-16	KB-20
	Rated output (KVA)	10	12	15	20	25
	Rated Current(A)	14.4	18	21.7	28.9	36.1
	Rated Voltage(V)	400/230V				
	Frequency(HZ)	50/60 HZ				
	Power Factor(COS&)	0.8(lagging)				
	Phase / Connection	3-phase 4-wire Ytype connection				
	Excitation	Harmonic Excitation or phase Compound or brushless				
	Voltage Regulation	Manual/Automatic				
	Starting	Manual/Electric start				
Net Weight(kg)	650	700	750	800	900	
Packing size LWH(cm)	176x80x95	186x80x95	186x88x95	205x88x105	215x88x105	

BAIHUA-EPA Authentication SERVERS DIESEL GENERATOR SETS

Model		EPA-8	EPA-10	EPA-12	EPA-15	EPA-20
Rated Power(KW)		8	10	12	15	19
ENGINE	Model	Y385G		Y485G		TY395D
	Rated output (kw)	13.2		18.4		20
	Governing method	Mechanical				
	Intaking method	Natural aspirated				
	Fuel Consumption(g/kw.h)	240		220		230
	Cooling Starting Method	Closed water cooled/electric starting				
GENERATOR	Model	KB-8	KB-10	KB-12	KB-15	KB-20
	Rated output (KVA)	10	12	15	20	25
	Rated Current(A)	14.4/34.8	18/43.5	21.7/52.2	27.1/65.2	36/86.7
	Rated Voltage(V)	400/230				
	Frequency(HZ)	50/60HZ				
	Power Factor(COS&)	0.8(lagging)				
	Phase / Connection	3-phase 4-wire Ytype connection				
	Excitation	Harmonic Excitation or phase Compound or brushless				
	Voltage Regulation	Manual/Automatic				
	Starting	Manual/Electric start				
Net Weight(kg)	600	620	640	680	710	
Packing size LWH(cm)	160x72x110			170x72x120		